


1500-3000 V DC ROC SECTION INSULATOR_

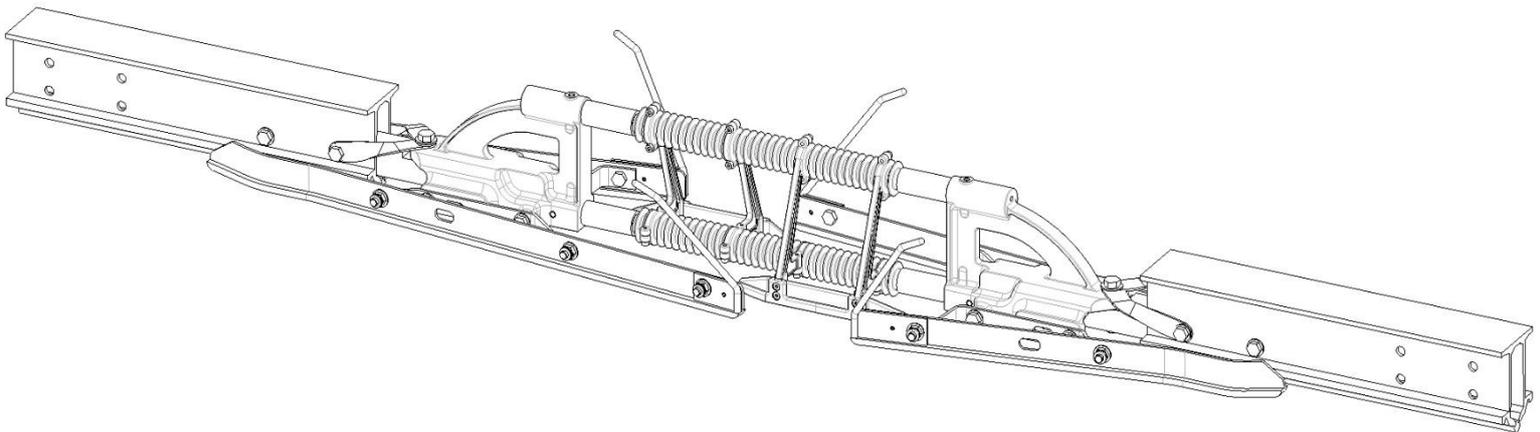

Application

This section insulator (S.I.) are used for the electrical segmentation of the catenary to divide the line in different sections for lines operations and maintenance, for ROC.

Design

- Speed: up to 200 km/h
- 1 contact wire

Technical particulars

- 1500 to 3000 V DC
- Weight = 19 kg
- Creepage distance = 800 mm
- Air gap = 150 mm
- Length = 1485 mm