


25 kV HIGH-SPEED SECTION INSULATOR

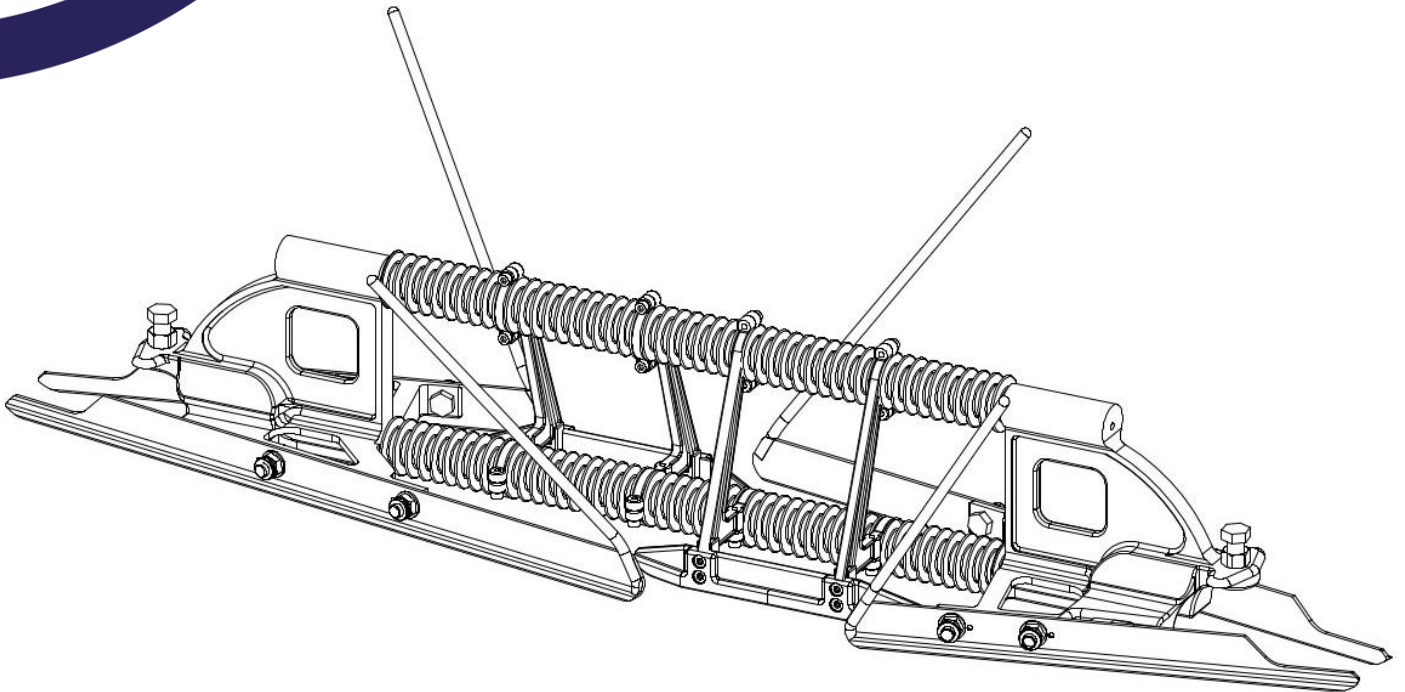

Application

Section insulators (S.I.) are used for the electrical segmentation of the catenary to divide the line in different sections for lines operations and maintenance.

Description

- For installation on main line and crossovers up to 220 km/h.
- For installation in depot see our reference JG2202.
- For one contact wire (CW) in BC107, BC120 or BC150 sq.mm according to EN 50149.
Alternatively, please contact us by sending design of clamping grooves, CW profile and available standard.
- Specific two contact wires version available.
- Bidirectional negotiation.

Option

- With accessories on Messenger Wire (MW) including dropper clamps, collar sockets, insulator.